



| ITEM NO. | CATALOG NUMBER | DESCRIPTION | MPS DRAWING NUMBER | QTY. |
|----------|------------------|---|--------------------|------|
| 1 | PY61UT954-HF | 61' PY TANGENT H-FRAME CROSSARM | 3006-567 | 1 |
| 2 | XB40K30-HF | PW XBRACE FOR 30' POLE SPACING | 3017-016 | 1 |
| 3 | G-227-NBC-7/8X12 | CLEVIS EYE TURNBUCKLE | AC7160 | 4 |
| 4 | J6823 | 3X3X.25 CURVED WASHER | 1658-007 | 1 |
| 5 | DETR60K-67 | DEADEND TEE, CAST IRON | CEA3768 | 4 |
| 6 | GYCC30-162 | GGUY STRAIN 30K, CLEVIS/Y-CLEVIS, 156 IN LG | CEB3849 | 4 |
| 7 | J8899 | BOLT-DBL ARM-3/4 X32 | 1652-069 | 5 |
| 8 | PW32UT1065-I | 32' PW H-FRAME BRACE | 3003-415 | 1 |

NOTES:

- UTILITY POLES ONLY FOR REFERENCE NOT INCLUDED WITH ASSEMBLY
- USE OF DOUBLE ARMING BOLTS ON TOP DEADEND TEES NOT RECOMMENDED AS IT WILL CAUSE INTERFERENCE WITH THE BRACES
- ULTIMATE VERTICAL CAPACITY PER PHASE: 23,000 LBS

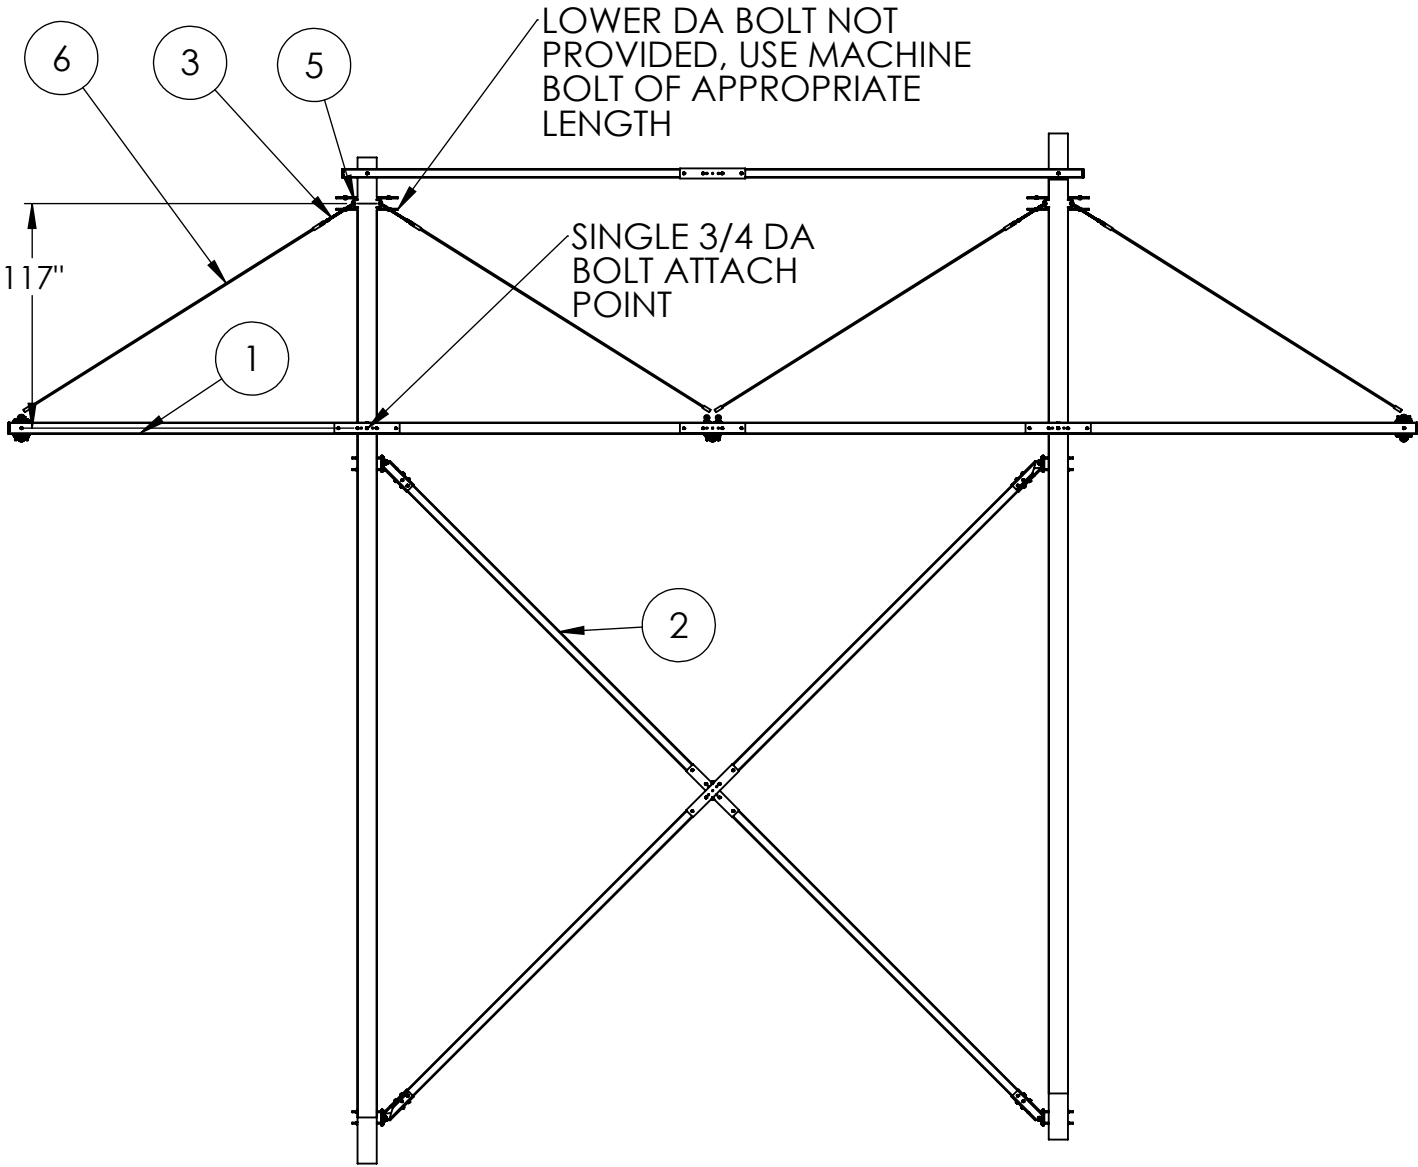

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION THAT IS THE PROPERTY OF MACLEAN POWER, L.L.C. ("MACLEAN"). USE OF MACLEAN'S CONFIDENTIAL INFORMATION WITHOUT MACLEAN'S EXPRESS WRITTEN CONSENT IS STRICTLY PROHIBITED AND MAY EXPOSE YOU TO LEGAL LIABILITY. IF YOU BELIEVE THAT YOU RECEIVED THIS MATERIAL IN ERROR, PLEASE DESTROY IT OR RETURN IT TO "MACLEAN POWER, L.L.C., 101 PARK AVE., NEWBERRY, SOUTH CAROLINA 29108, "USA."

| | | | | |
|---------------------|------------------|---|---|---|
| CATALOG NUMBER: | CUSTOMER NUMBER: | PART NUMBER: | DRAWING NUMBER: | DO NOT SCALE DRAWING |
| HFKIT-016 | | | 3016-016 | CAD GENERATED DRAWING DO NOT MANUALLY UPDATE |
| PHYSICAL PROPERTIES | | <div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES</div> <div>TOLERANCES ARE: XX +/- 1/4 X/XX +/- 1/32 ANGLES +/- 1°</div> <div> 101 PARK AVE. NEWBERRY, SC. 29108 TEL. (803) 628-7700 FAX: (803) 628-2139</div> | SHEET: 1 OF 1 | DESIGN DATE: 10/28/24 |
| MATERIAL: | | | DRAWING DESCRIPTION: 30' POLE SPACING SINGLE ARM | DRAWN BY: PNR |
| APPROX. WEIGHT : | 4240.21 LBS | | PRODUCT LINE: CROSSARMS | ENGINEER: |
| VOLUME: | IN3 | | | APPROVED: |
| | | | | SCALE: 1:100 |